

► Our technology. Your success.

Pumps • Valves • Service



Calio-Therm S – Drinking Water Circulator



Applications:

Drinking water circulation systems
in single-family houses

More information:

www.ksb.com/products

Calio-Therm S – Drinking Water Circulator

1 Demand-driven operation

Optimised efficiencies. Available as variable-speed pump or with manual setting of up to 3 speed levels

2 Universal use

High-quality materials for a broad range of applications with fluid temperatures from 2 to 95 °C

3 Maximum availability


Low motor speeds and special sealing elements reduce wear to a minimum.

4 Cost efficiency

- Simple 3-button setting combined with speed control minimises commissioning and operating costs.
- Protective and manual functions of the pump keep service costs down.
- Maximum savings in operating costs by proportional-pressure or constant-pressure control modes combined with high-efficiency technology

5 Ease of handling and operation

- **New:** 230 V plug, benefit: the pump replaces any other make without the need to change the plug.
- Whisper quiet operation (≤ 30 dB(A))

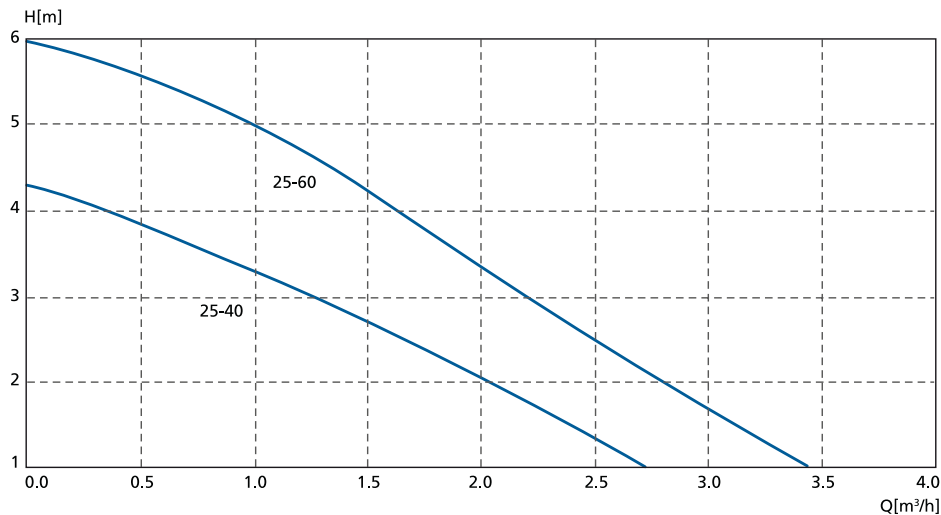

Calio-Therm S characteristic curves

Technical data

Flow rate	Up to 3.5 m³/h
Head	Up to 6 mWC
Fluid temperature	+2 to 95 °C
Operating pressure	PN 10
Process connection	Rp 1"
Power supply	1~230 VAC 50/60 Hz
Enclosure	IP42



KSB SE & Co. KGaA
Johann-Klein-Straße 9
67227 Frankenthal (Germany)
www.ksb.com