

Pioneering for You

wilo



Wilo-DrainLift MINI3
and Wilo-DrainLift MINI5 lifting units

Drainage made easy.








NEW!



Simple selection: Find the correct lifting unit!



Selectable discharge outlet!

		Wilo-DrainLift MINI3			Wilo-DrainLift MINI5	
		-XXS	-XS	-XS/WC	-XS/C	-XS/WC
What can the lifting unit be connected to?						
Washing machines			●		●	
Dishwashers, sinks			●		●	
Showers		●	●	●	●	●
Bathtubs			●		●	
Wash basins		●	●	●	●	●
For all types of toilets, urinals				●		●
Water softening and condensate					●	
What connection options are there?						
Discharge port		1 x horizontal (DN 32)	1 x vertical (DN 32/40)	1 x vertical (DN 32/40)	1 x vertical or 1 x horizontal (DN 32/40)	1 x vertical or 1 x horizontal (DN 32/40)
Inlet connection		2 x horizontal (DN 40/50) 1 x vertical (DN 40)	2 x horizontal (DN 40/50) 1 x vertical (DN 40)	2 x horizontal (DN 40/50) 1 x vertical (DN 40)	2 x horizontal (DN 40/50) 1 x vertical (DN 40)	2 x horizontal (DN 40/50) 1 x vertical (DN 40)
Toilet connection		–	–	1 x frontal (DN 100) or 1 x lateral	–	1 x frontal (DN 100) or 1 x lateral

Up to 33% salt content for aggressive fluids!



Simply the right lifting unit for the job.

A basement is being converted and fitted with a bathroom or laundry room. The kitchen for the new basement apartment has to happen. You need a lifting unit for drainage of these rooms below the backflow level. In this respect, installation conditions are often less than perfect: they frequently offer limited space and existing pipework has to be accommodated.

The lifting unit therefore has to be compact, be suitable for the actual space and provide the right connection options. It should also be simple and quick to install. After all, nobody wants to waste time, but instead to work as efficiently as possible. And that is precisely why we have developed two series for you that offer exactly those features: compact solutions that can be quickly and easily implemented.

Discover our new lifting units for room drainage and choose the one that suits you.

→ **SIMPLY TIME-EFFICIENT.**

We provide a manageable product portfolio of flexible lifting units that can be used in every situation. This makes it simpler to choose between them, results in fewer incorrect purchases and saves you valuable time.

→ **QUICK AND CONVENIENT TO INSTALL.**

Our lifting units offer various connection options so they can be quickly and easily installed in bathrooms, laundry rooms or basement flats that are below the backflow level.

→ **SIMPLY WELL THOUGHT OUT.**

The innovative design of the Wilo-DrainLift MINI5 ensures easy and, most importantly, hygienic access to pumps and level control devices.



MINI3-XXS

Simply space-saving:

The lifting unit can fit into the smallest of recesses. The vertical inlet allows it to be installed directly under a washbasin.

Ready-to-plug:
easy to install!



MINI3-XS

Simply low-noise:

The lifting unit makes less noise than a conventional dishwasher.

Simply replaced:

Various connections make it easier and more convenient to replace older models and install new ones using the existing pipework.

Wilo-DrainLift MINI3

Compact solutions that are particularly convenient to install.

The lifting units in the Wilo-DrainLift MINI3 series are both compact and ready-to-plug – they can be quickly and easily installed in a concealed wall. The Wilo-DrainLift MINI3-XS also comes in a WC version with a grinder pump. The factory setting is a WC connection on the front. If necessary, this connection can also be installed on the side. In the table below, you can see which lifting units can be replaced with new versions.

The right choice for new installations or replacements



Wilo-DrainLift MINI3	-XXS	-XS	-XS/WC with macerator
Size (W x H x D) in mm	299 x 170 x 159	389 x 266 x 167	389 x 266 x 169
Volume flow Q _{max} .	6 m ³ /h	6.5 m ³ /h	9 m ³ /h
Delivery head H _{max} .	5.5 m	8 m	9 m
Maximum temperature	40 °C (75 °C for max. 5 min)	40 °C (75 °C for max. 5 min)	40 °C (75 °C for max. 5 min)

These lifting units can be replaced with the new series!

Wilo (previous model)	HiDrainLift 3-24	HiDrainlift 3-35 HiDrainLift 3-37	HiSewlift 3-135 HiSewlift 3-15 HiSewlift 3-35
Grundfos	SOLOlift2 D-3	SOLOlift2 D-3	SOLOlift2 WC-1/3
Jung	HEBEFIX MINI	HEBEFIX plus	WCFIX 260
Saniflo SFA	Sanishower Flat Sanifloor	Sanidouche+ Saniaccess Sanispeed+	Saniaccess Sanibroy UP

Subject to errors and technical changes without prior notice

Wilo-DrainLift MINI5

Greater convenience when installing, even if modernising.

Especially when you are modernising, you will need a solution that offers maximum flexibility and can be adapted to the specific context of the rooms. And that is exactly why we developed the MINI5 series of lifting units. These include a number of discharge ports and inlet connections, as well as a larger characteristic curve for the flow rate. The lifting units are also able to withstand aggressive fluids. A flexible discharge port makes it particularly convenient to install.

A look inside the lifting unit: After opening the cover, it is possible to access the interior in a hygienic way. As required, the pump and level control device can be easily replaced.



The right choice for modernisation:




Wilo-DrainLift MINI5	-XS/C	-XS/WC with macerator
Size (W x H x D) in mm	455 x 281 x 169	455 x 281 x 169
Volume flow Q_{max}.	9.5 m ³ /h	9 m ³ /h
Delivery head H_{max}.	11 m	9 m
Maximum temperature	50 °C (max. 75 °C for max. 30 min)	50 °C (max. 75 °C for max. 30 min)
Alarm contact	Integrated high water warning with buzzer, and potential-free contact (max. 42 V / 500 mA)	Integrated high water warning with buzzer, and potential-free contact (max. 42 V / 500 mA)

Integrated high water warning

These lifting units can be replaced with the new series!

Grundfos	SOLOLift C-3	SOLOLift CWC-3
Jung	HEBEFIX plus HEBEFIX extra HEBEFIX MINI	WCFIX Plus
Saniflo SFA	Sanifast Sanivite	Sanibest Pro Sanibroy Pro UP Sanipro XR UP




MINI5-XS/C

Simply accessible:

Access to both the pump and level control device is particularly hygienic due to the partition and well thought-out design.

A flexible discharge port means it is even more convenient than ever to install, irrespective of existing on-site pipework.

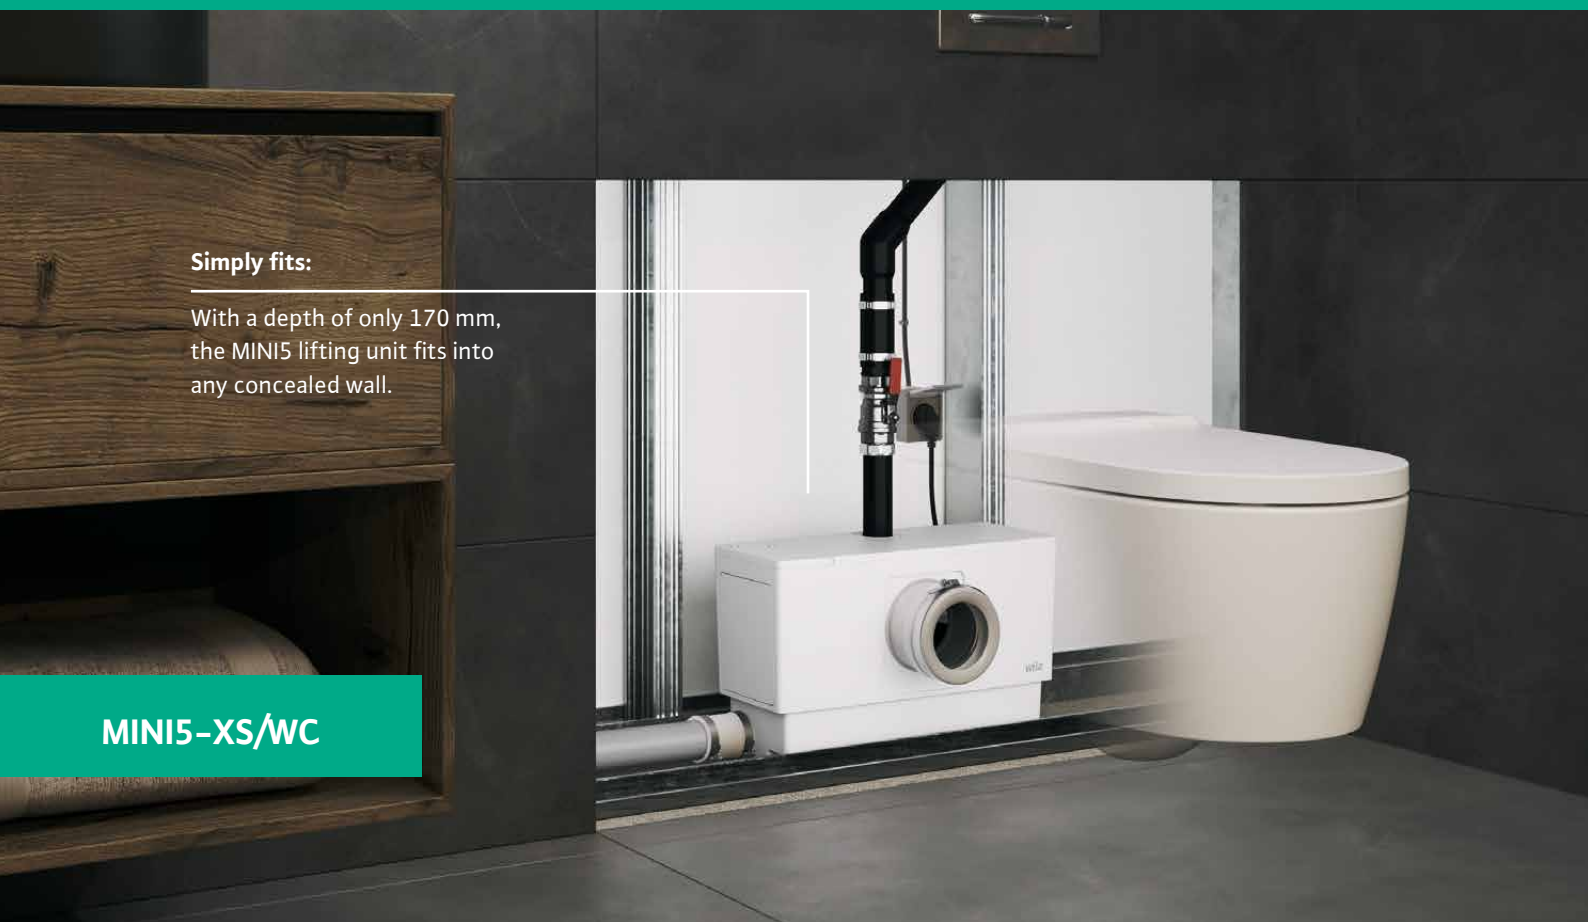

Simply fits:

With a depth of only 170 mm, the MINI5 lifting unit fits into any concealed wall.

MINI5-XS/WC

Pioneering for You

wilo

WILO SE
Wilopark 1
44263 Dortmund